
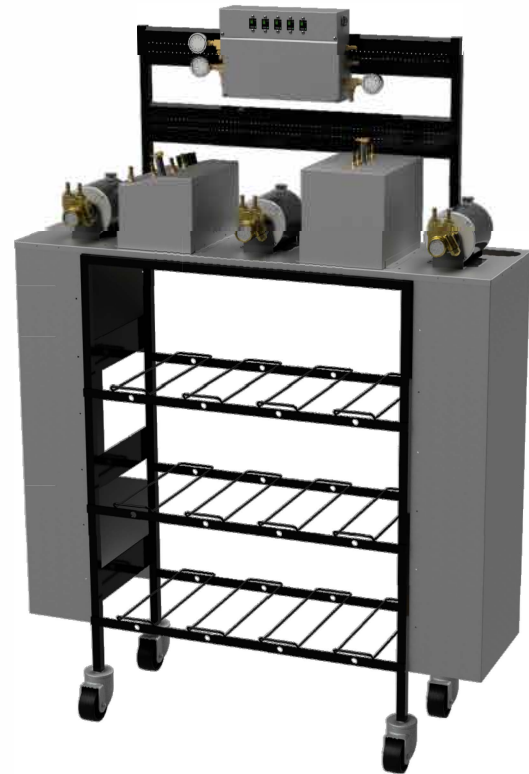
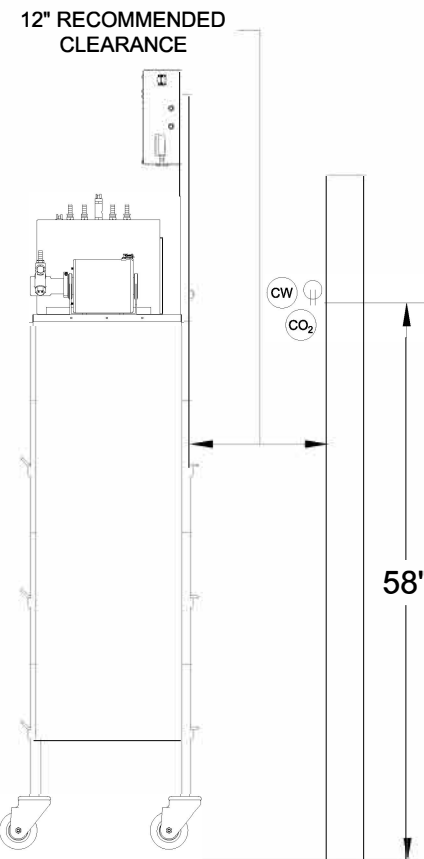


\*\*OPTIONAL AREA FLOOR DRAIN WITHIN 6' OF SODA RACK LOCATION

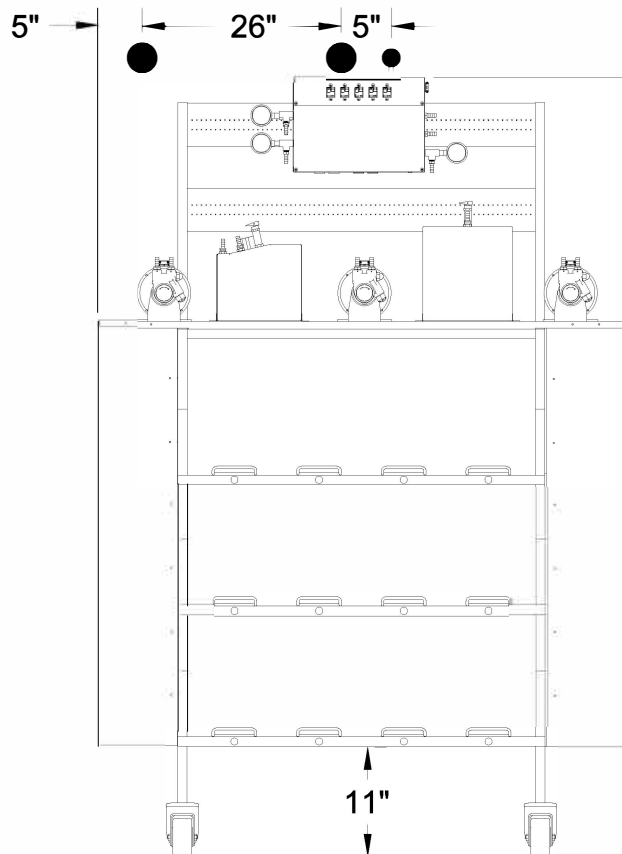

LEGEND AND NOTES

- 115V/60/1, NEMA 5-20P (QUANTITY OF ONE[1] REQUIRES ONE[1]: 20 AMP CIRCUITS, NEMA 5-20P)
- $\frac{1}{2}$ " COLD WATER INLET (FILTERED WATER RECOMMENDED)  
INCOMING COLD WATER PSI: 50 PSI  
INCOMING COLD WATER GPH: 100 GPH
- $\frac{3}{8}$ " I.D. CO<sub>2</sub> SUPPLY FROM CO<sub>2</sub> BULK TANK. MUST MAINTAIN 100 PSI.
- PROVIDE 12" MINIMUM CLEARANCE BEHIND SODA RACK AND WALL FOR INSTALLATION OF CONNECTIONS AND PANEL SERVICEABILITY
- AREA FLOOR DRAIN RECOMMENDED WITHIN 6' OF SODA RACK LOCATION
- SEE SODA SYSTEM OVERVIEW FOR MORE INFORMATION

SCALE: N/A

COLORATION IS A DIGITAL REPRESENTATION AND DOES NOT REFLECT ACTUAL COLOR

THIS DRAWING IS THE PROPERTY OF STS TECHNOLOGIES, AND SHALL NOT BE USED OR RECREATED WITHOUT WRITTEN CONSENT FROM STS TECHNOLOGIES.

SODA RACK DETAIL

DRAWN BY: Sheldon Kerr DATE: 5/21/2020

SHEET: 1/1

